


# DOOR SMALLER THAN FIXED PANEL



A Overall Width	B Door Width	C Fixed Panel Width	D Overlap With Closed Door	E Opening
1200mm	600mm	650mm	- 63mm	547mm
1205mm	600mm	650mm	- 58mm	552mm
1210mm	600mm	650mm	- 53mm	557mm
1215mm	600mm	650mm	- 48mm	562mm
1220mm	600mm	650mm	- 43mm	567mm
1225mm	600mm	650mm	- 38mm	572mm
1230mm	600mm	650mm	- 33mm	577mm
1235mm	600mm	650mm	- 28mm	582mm
1240mm	600mm	650mm	- 23mm	587mm

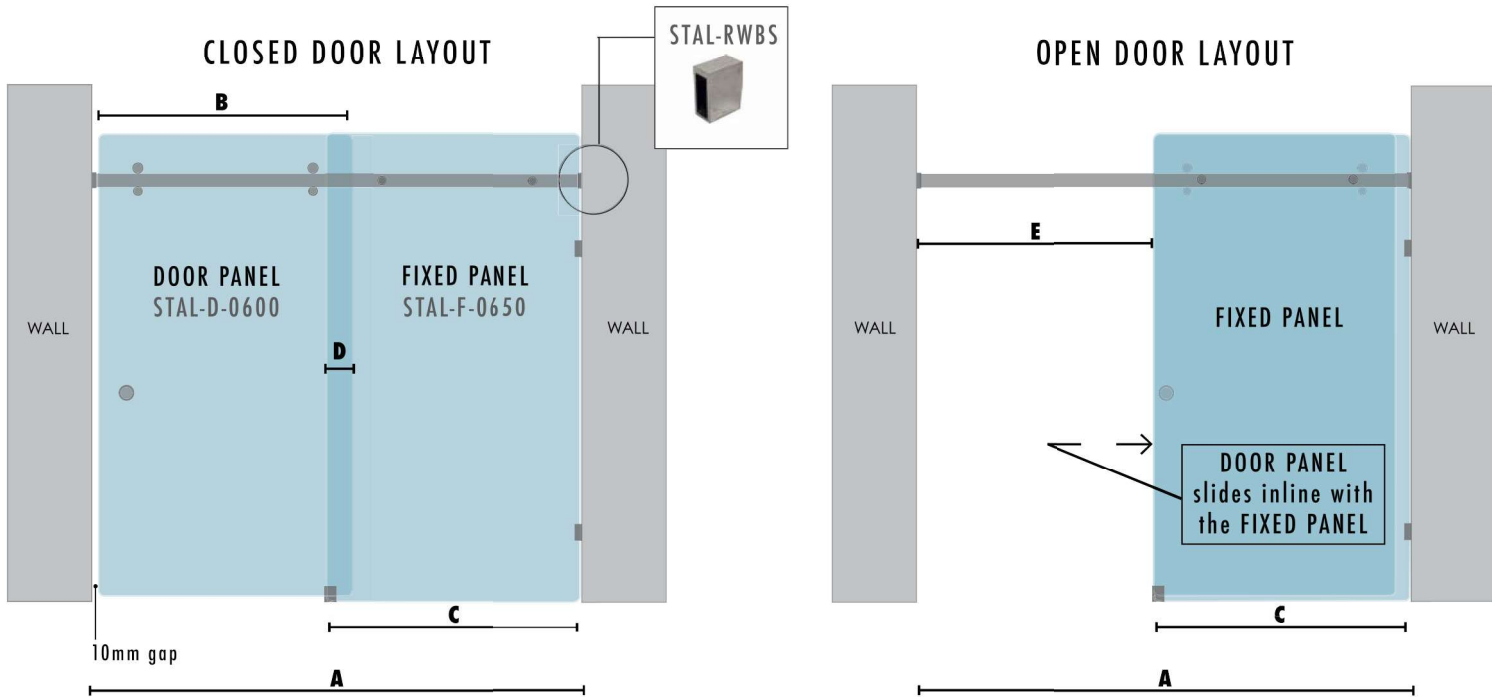


## SPACINGS BASED ON ABOVE ASSUMPTIONS

1. Fixed panel installed with Purity wall brackets which produces a 3mm silicon joint gap. If wall channel is used, specified opening sizes overlaps, etc will change.
2. Edge of glass door must remain 10mm from wall. 10mm door bulb recommended to use for buffering or if not used, 10mm safety margin gap required.
3. When door is open, minimum 15mm gap is required from wall (for safety margin buffering).


**\* When using a 650mm wide fixed panel, it is important to purchase 1 x slimline wall bracket separately (STAL-RWBS) due to space restrictions between the rail fixing bracket and the wall.**

# DOOR IS WIDER THAN FIXED PANEL

CLOSED DOOR LAYOUT

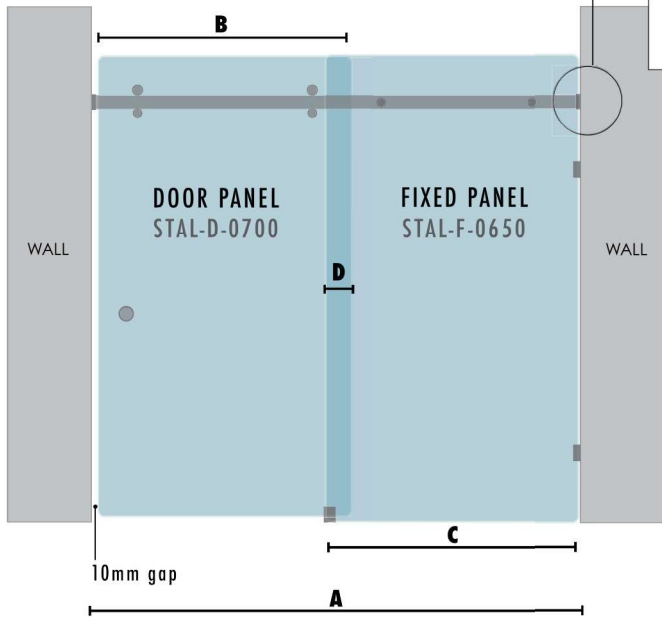

OPEN DOOR LAYOUT

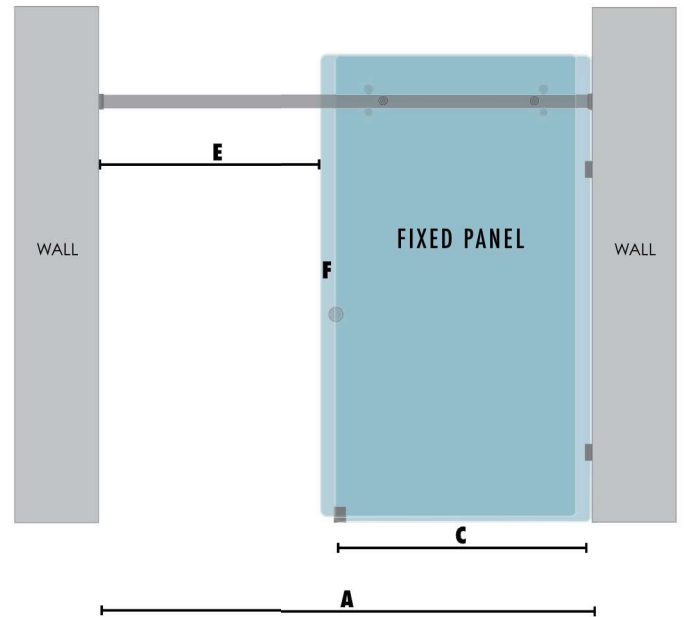

A Overall Width	B Door Width	C Fixed Panel Width	D Overlap With Closed Door	E Opening	F Panel Overlap When Door Open
1240mm	700mm	650mm	- 123mm	525mm	62mm
1245mm	700mm	650mm	- 118mm	530mm	62mm
1250mm	700mm	650mm	- 113mm	535mm	62mm
1255mm	700mm	650mm	- 108mm	540mm	62mm
1260mm	700mm	650mm	- 103mm	545mm	62mm
1265mm	700mm	650mm	- 98mm	550mm	62mm
1270mm	700mm	650mm	- 93mm	555mm	62mm
1275mm	700mm	650mm	- 88mm	560mm	62mm
1280mm	700mm	650mm	- 83mm	565mm	62mm
1285mm	700mm	650mm	- 78mm	570mm	62mm
1290mm	700mm	650mm	- 73mm	575mm	62mm
1295mm	700mm	650mm	- 68mm	580mm	62mm
1300mm	700mm	650mm	- 63mm	585mm	62mm
1305mm	700mm	650mm	- 58mm	590mm	62mm
1310mm	700mm	650mm	- 53mm	595mm	62mm
1315mm	700mm	650mm	- 48mm	600mm	62mm
1320mm	700mm	650mm	- 43mm	605mm	62mm
1325mm	700mm	650mm	- 38mm	610mm	62mm
1330mm	700mm	650mm	- 33mm	615mm	62mm
1335mm	700mm	650mm	- 28mm	620mm	62mm
1340mm	700mm	650mm	- 23mm	625mm	62mm




**SPACINGS BASED ON ABOVE ASSUMPTIONS**

1. Fixed panel installed with Purity wall brackets which produces a 3mm silicon joint gap. If wall channel is used, specified opening sizes, overlaps, etc will change.
2. Edge of glass door must remain 10mm from wall. 10mm door bulb recommended to use for buffering or if not used, 10mm safety margin gap required.
3. When door is open, minimum 15mm gap is required from wall (for safety margin buffering).

**\* When using a 650mm wide fixed panel, it is important to purchase 1 x slimline wall bracket separately (STAL-RWBS) due to space restrictions between the rail fixing bracket and the wall.**

# DOOR SMALLER THAN FIXED PANEL

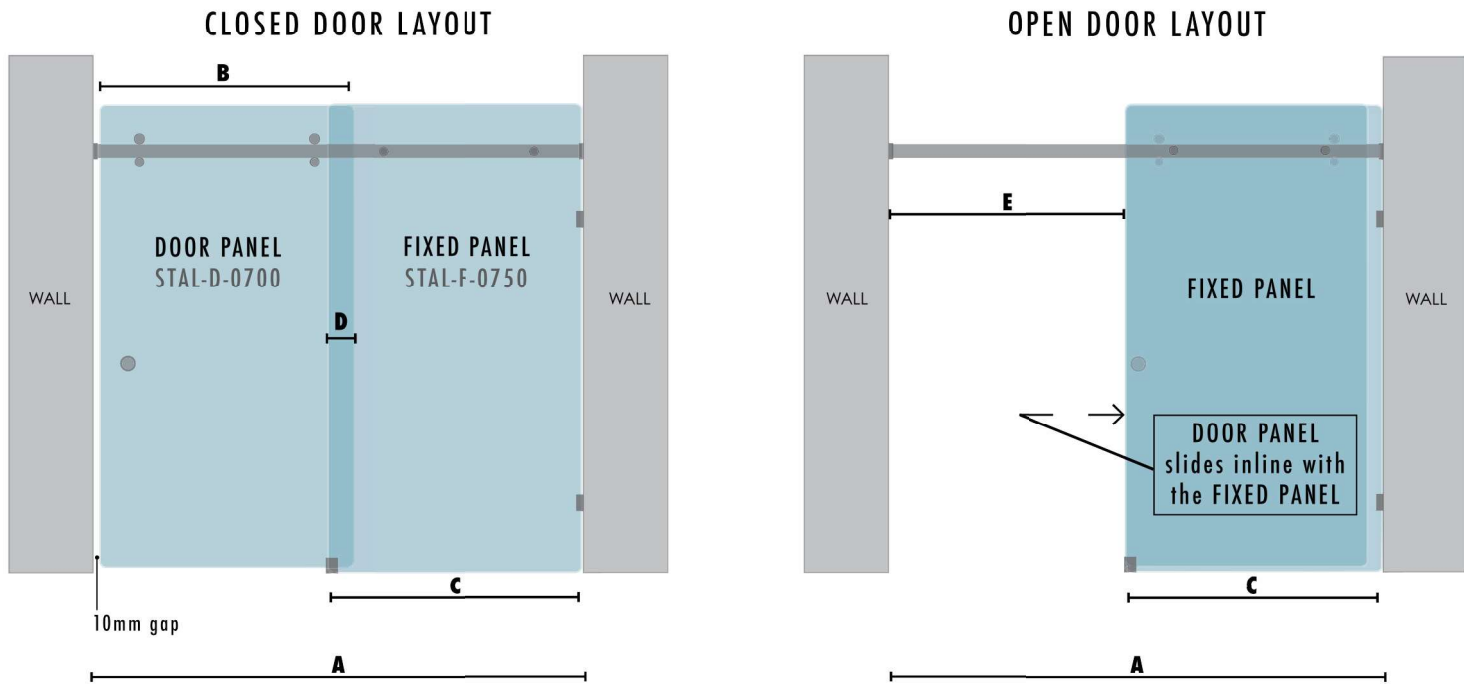

A	B	C	D	E
Overall Width	Door Width	Fixed Panel Width	Overlap With Closed Door	Opening
1340mm	700mm	750mm	- 123mm	587mm
1345mm	700mm	750mm	- 118mm	592mm
1350mm	700mm	750mm	- 113mm	597mm
1355mm	700mm	750mm	- 108mm	602mm
1360mm	700mm	750mm	- 103mm	607mm
1365mm	700mm	750mm	- 98mm	612mm
1370mm	700mm	750mm	- 93mm	617mm
1375mm	700mm	750mm	- 88mm	622mm
1380mm	700mm	750mm	- 83mm	627mm
1385mm	700mm	750mm	- 78mm	632mm
1390mm	700mm	750mm	- 73mm	637mm
1395mm	700mm	750mm	- 68mm	642mm
1400mm	700mm	750mm	- 63mm	647mm
1405mm	700mm	750mm	- 58mm	652mm
1410mm	700mm	750mm	- 53mm	657mm
1415mm	700mm	750mm	- 48mm	662mm
1420mm	700mm	750mm	- 43mm	667mm
1425mm	700mm	750mm	- 38mm	672mm
1430mm	700mm	750mm	- 33mm	677mm
1435mm	700mm	750mm	- 28mm	682mm
1440mm	700mm	750mm	- 23mm	687mm




## SPACINGS BASED ON ABOVE ASSUMPTIONS


1. Fixed panel installed with Purity wall brackets which produces a 3mm silicon joint gap. If wall channel is used, specified opening sizes overlaps, etc will change.
2. Edge of glass door must remain 10mm from wall. 10mm door bulb recommended to use for buffering or if not used, 10mm safety margin gap required.
3. When door is open, minimum 15mm gap is required from wall (for safety margin buffering).

# DOOR IS WIDER THAN FIXED PANEL

CLOSED DOOR LAYOUT

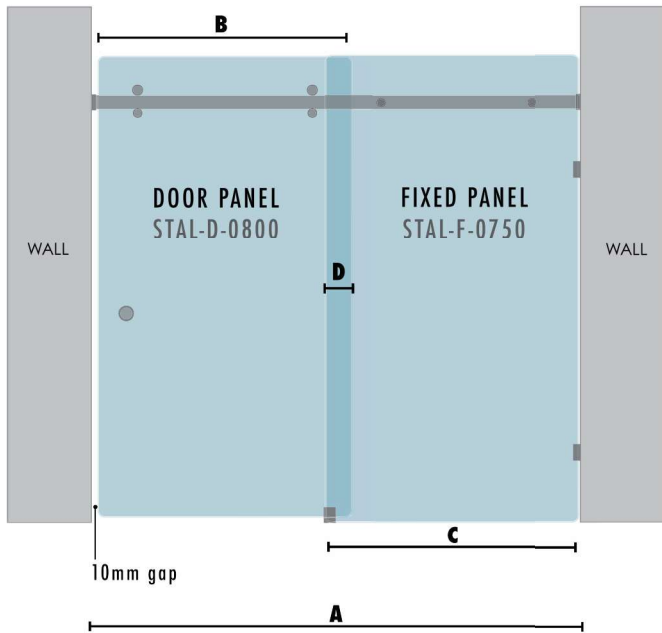

OPEN DOOR LAYOUT

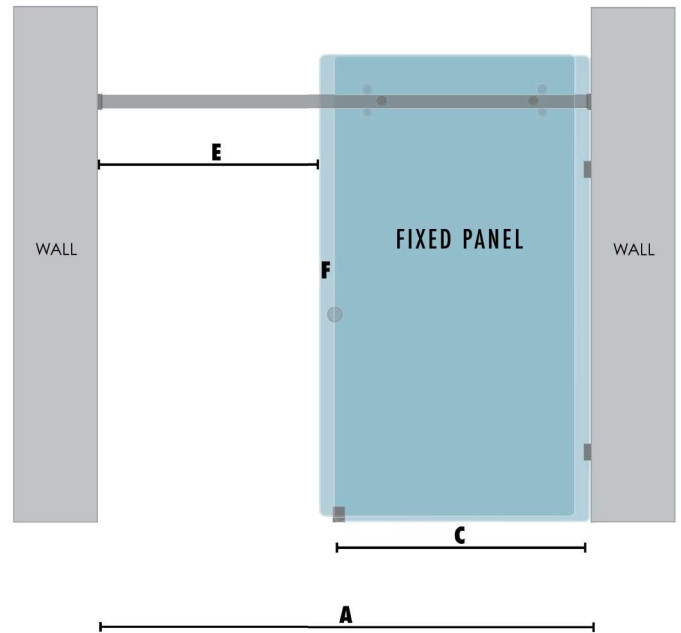


A Overall Width	B Door Width	C Fixed Panel Width	D Overlap With Closed Door	E Opening	F Panel Overlap When Door Open
1440mm	800mm	750mm	- 123mm	625mm	62mm
1445mm	800mm	750mm	- 118mm	630mm	62mm
1450mm	800mm	750mm	- 113mm	635mm	62mm
1455mm	800mm	750mm	- 108mm	640mm	62mm
1460mm	800mm	750mm	- 103mm	645mm	62mm
1465mm	800mm	750mm	- 98mm	650mm	62mm
1470mm	800mm	750mm	- 93mm	655mm	62mm
1475mm	800mm	750mm	- 88mm	660mm	62mm
1480mm	800mm	750mm	- 83mm	665mm	62mm
1485mm	800mm	750mm	- 78mm	670mm	62mm
1490mm	800mm	750mm	- 73mm	675mm	62mm
1495mm	800mm	750mm	- 68mm	680mm	62mm
1500mm	800mm	750mm	- 63mm	685mm	62mm
1505mm	800mm	750mm	- 58mm	690mm	62mm
1510mm	800mm	750mm	- 53mm	695mm	62mm
1515mm	800mm	750mm	- 48mm	700mm	62mm
1520mm	800mm	750mm	- 43mm	705mm	62mm
1525mm	800mm	750mm	- 38mm	710mm	62mm
1530mm	800mm	750mm	- 33mm	715mm	62mm
1535mm	800mm	750mm	- 28mm	720mm	62mm
1540mm	800mm	750mm	- 23mm	725mm	62mm



**SPACINGS BASED ON ABOVE ASSUMPTIONS**

1. Fixed panel installed with Purity wall brackets which produces a 3mm silicon joint gap. If wall channel is used, specified opening sizes overlaps, etc will change.
2. Edge of glass door must remain 10mm from wall. 10mm door bulb recommended to use for buffering or if not used, 10mm safety margin gap required.
3. When door is open, minimum 15mm gap is required from wall (for safety margin buffering).

# DOOR SMALLER THAN FIXED PANEL

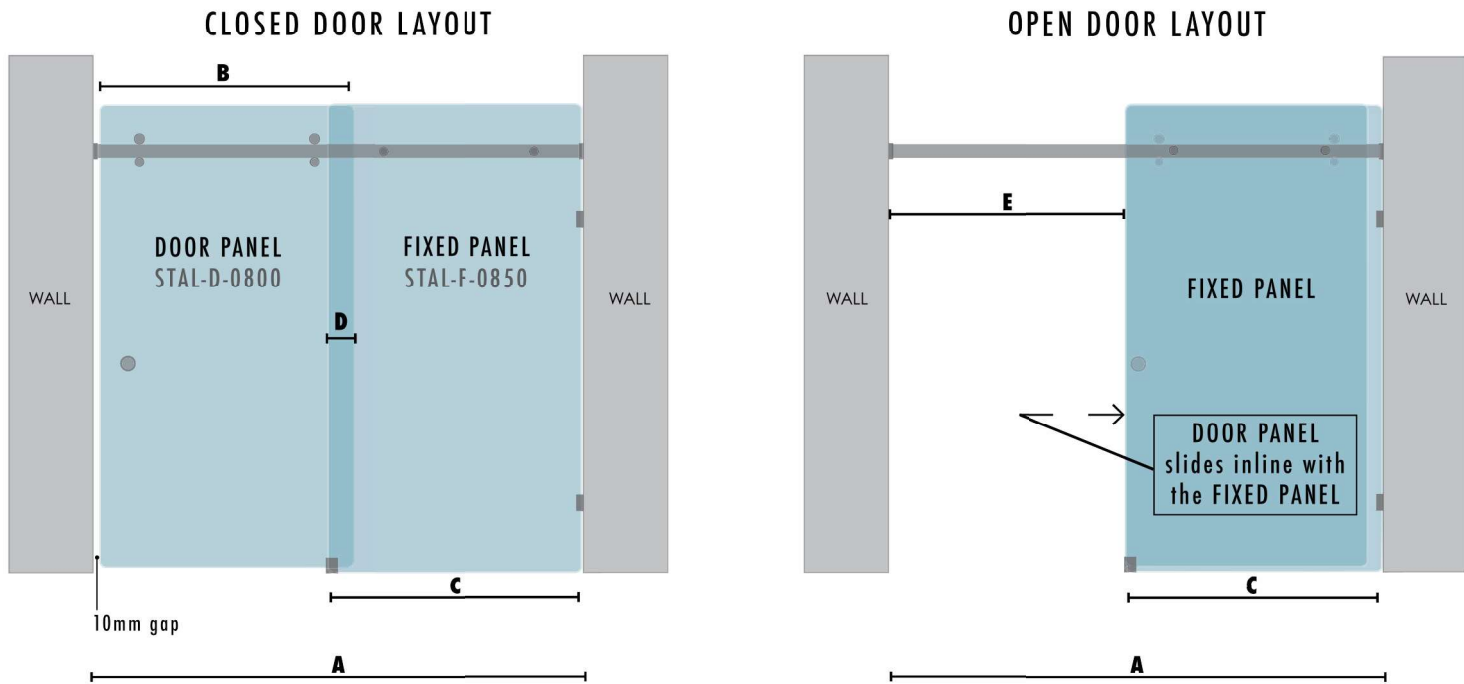

A	B	C	D	E
Overall Width	Door Width	Fixed Panel Width	Overlap With Closed Door	Opening
1540mm	800mm	850mm	- 123mm	687mm
1545mm	800mm	850mm	- 118mm	692mm
1550mm	800mm	850mm	- 113mm	697mm
1555mm	800mm	850mm	- 108mm	702mm
1560mm	800mm	850mm	- 103mm	707mm
1565mm	800mm	850mm	- 98mm	712mm
1570mm	800mm	850mm	- 93mm	717mm
1575mm	800mm	850mm	- 88mm	722mm
1580mm	800mm	850mm	- 83mm	727mm
1585mm	800mm	850mm	- 78mm	732mm
1590mm	800mm	850mm	- 73mm	737mm
1595mm	800mm	850mm	- 68mm	742mm
1600mm	800mm	850mm	- 63mm	747mm
1605mm	800mm	850mm	- 58mm	752mm
1610mm	800mm	850mm	- 53mm	757mm
1615mm	800mm	850mm	- 48mm	762mm
1620mm	800mm	850mm	- 43mm	767mm
1625mm	800mm	850mm	- 38mm	772mm
1630mm	800mm	850mm	- 33mm	777mm
1635mm	800mm	850mm	- 28mm	782mm
1640mm	800mm	850mm	- 23mm	787mm




## SPACINGS BASED ON ABOVE ASSUMPTIONS


1. Fixed panel installed with Purity wall brackets which produces a 3mm silicon joint gap. If wall channel is used, specified opening sizes overlaps, etc will change.
2. Edge of glass door must remain 10mm from wall. 10mm door bulb recommended to use for buffering or if not used, 10mm safety margin gap required.
3. When door is open, minimum 15mm gap is required from wall (for safety margin buffering).

# DOOR IS WIDER THAN FIXED PANEL

CLOSED DOOR LAYOUT

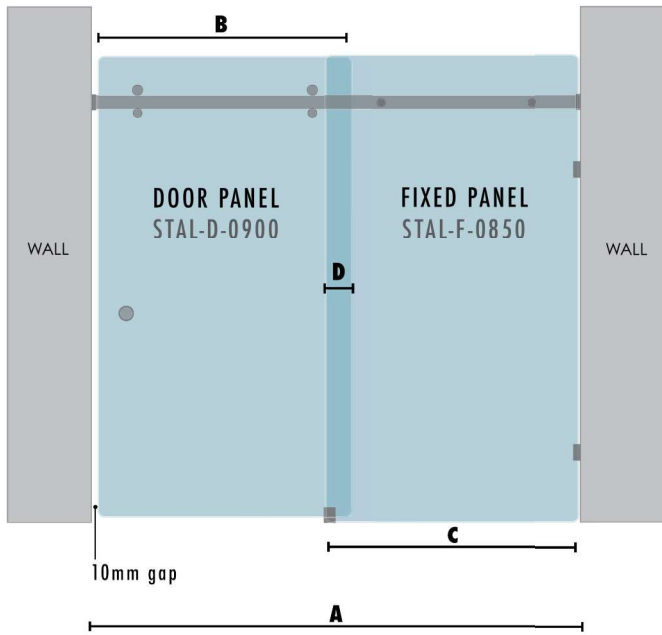

OPEN DOOR LAYOUT

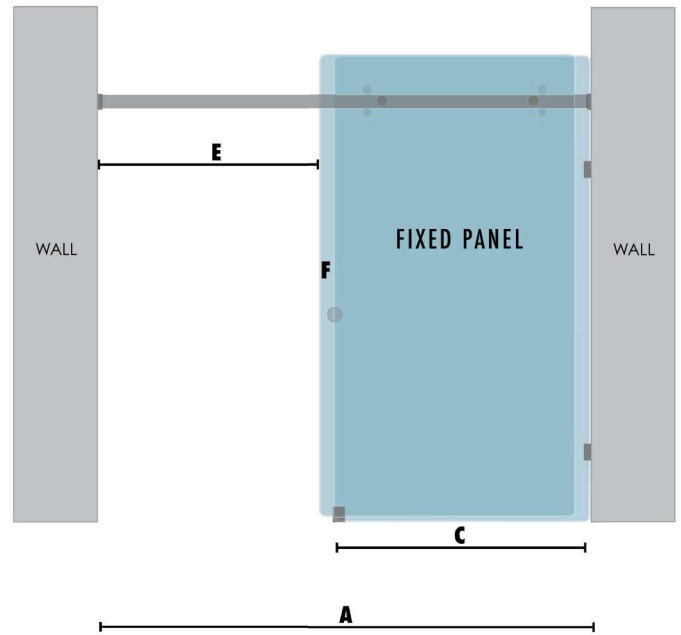


A Overall Width	B Door Width	C Fixed Panel Width	D Overlap With Closed Door	E Opening	F Panel Overlap When Door Open
1640mm	900mm	850mm	- 123mm	625mm	62mm
1645mm	900mm	850mm	- 118mm	630mm	62mm
1650mm	900mm	850mm	- 113mm	635mm	62mm
1655mm	900mm	850mm	- 108mm	640mm	62mm
1660mm	900mm	850mm	- 103mm	645mm	62mm
1665mm	900mm	850mm	- 98mm	650mm	62mm
1670mm	900mm	850mm	- 93mm	655mm	62mm
1675mm	900mm	850mm	- 88mm	660mm	62mm
1680mm	900mm	850mm	- 83mm	665mm	62mm
1685mm	900mm	850mm	- 78mm	670mm	62mm
1690mm	900mm	850mm	- 73mm	675mm	62mm
1695mm	900mm	850mm	- 68mm	680mm	62mm
1700mm	900mm	850mm	- 63mm	685mm	62mm
1705mm	900mm	850mm	- 58mm	690mm	62mm
1710mm	900mm	850mm	- 53mm	695mm	62mm
1715mm	900mm	850mm	- 48mm	700mm	62mm
1720mm	900mm	850mm	- 43mm	705mm	62mm
1725mm	900mm	850mm	- 38mm	710mm	62mm
1730mm	900mm	850mm	- 33mm	715mm	62mm
1735mm	900mm	850mm	- 28mm	720mm	62mm
1740mm	900mm	850mm	- 23mm	725mm	62mm



**SPACINGS BASED ON ABOVE ASSUMPTIONS**

1. Fixed panel installed with Purity wall brackets which produces a 3mm silicon joint gap. If wall channel is used, specified opening sizes, overlaps, etc will change.
2. Edge of glass door must remain 10mm from wall. 10mm door bulb recommended to use for buffering or if not used, 10mm safety margin gap required.
3. When door is open, minimum 15mm gap is required from wall (for safety margin buffering).

# DOOR SMALLER THAN FIXED PANEL

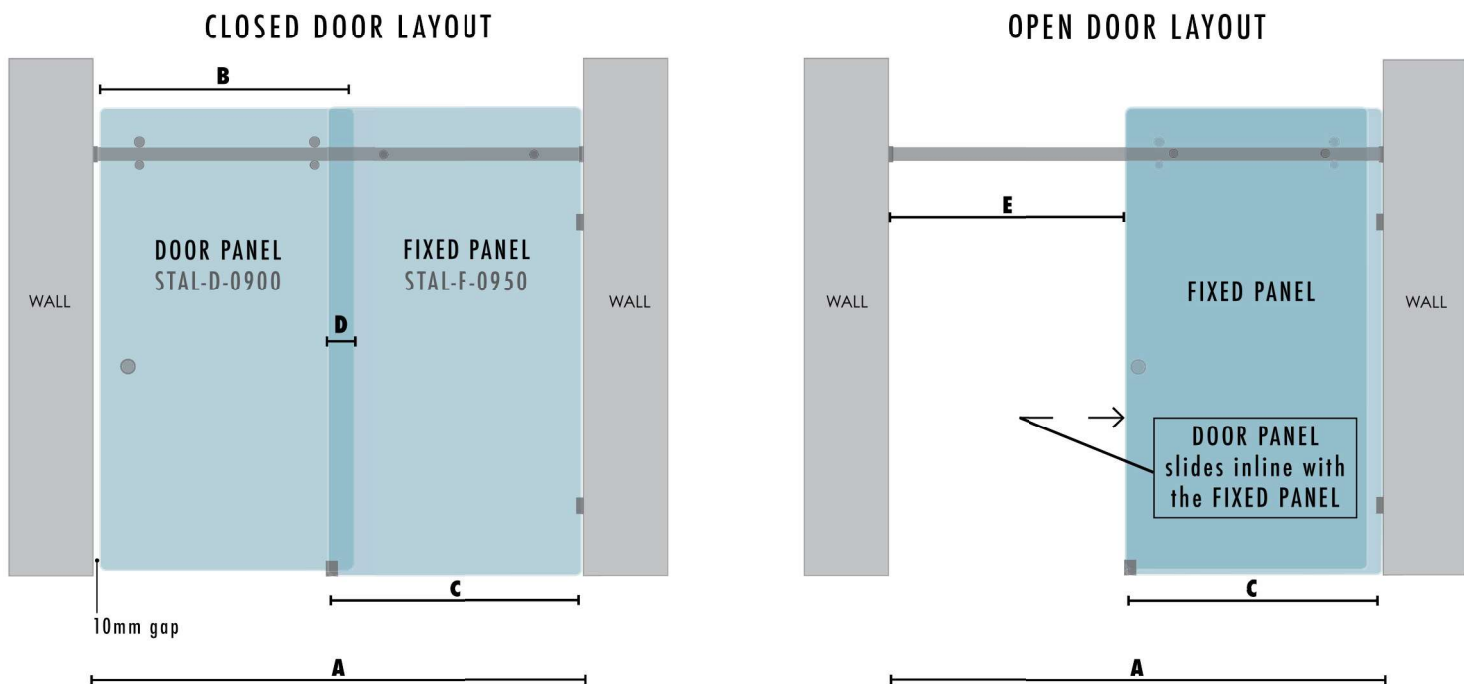

A	B	C	D	E
Overall Width	Door Width	Fixed Panel Width	Overlap With Closed Door	Opening
1740mm	900mm	950mm	- 123mm	687mm
1745mm	900mm	950mm	- 118mm	692mm
1750mm	900mm	950mm	- 113mm	697mm
1755mm	900mm	950mm	- 108mm	702mm
1760mm	900mm	950mm	- 103mm	707mm
1765mm	900mm	950mm	- 98mm	712mm
1770mm	900mm	950mm	- 93mm	717mm
1775mm	900mm	950mm	- 88mm	722mm
1780mm	900mm	950mm	- 83mm	727mm
1785mm	900mm	950mm	- 78mm	732mm
1790mm	900mm	950mm	- 73mm	737mm
1795mm	900mm	950mm	- 68mm	742mm
1800mm	900mm	950mm	- 63mm	747mm
1805mm	900mm	950mm	- 58mm	752mm
1810mm	900mm	950mm	- 53mm	757mm
1815mm	900mm	950mm	- 48mm	762mm
1820mm	900mm	950mm	- 43mm	767mm
1825mm	900mm	950mm	- 38mm	772mm
1830mm	900mm	950mm	- 33mm	777mm
1835mm	900mm	950mm	- 28mm	782mm
1840mm	900mm	950mm	- 23mm	787mm




## SPACINGS BASED ON ABOVE ASSUMPTIONS


1. Fixed panel installed with Purity wall brackets which produces a 3mm silicon joint gap. If wall channel is used, specified opening sizes overlaps, etc will change.
2. Edge of glass door must remain 10mm from wall. 10mm door bulb recommended to use for buffering or if not used, 10mm safety margin gap required.
3. When door is open, minimum 15mm gap is required from wall (for safety margin buffering).

# DOOR IS WIDER THAN FIXED PANEL

CLOSED DOOR LAYOUT

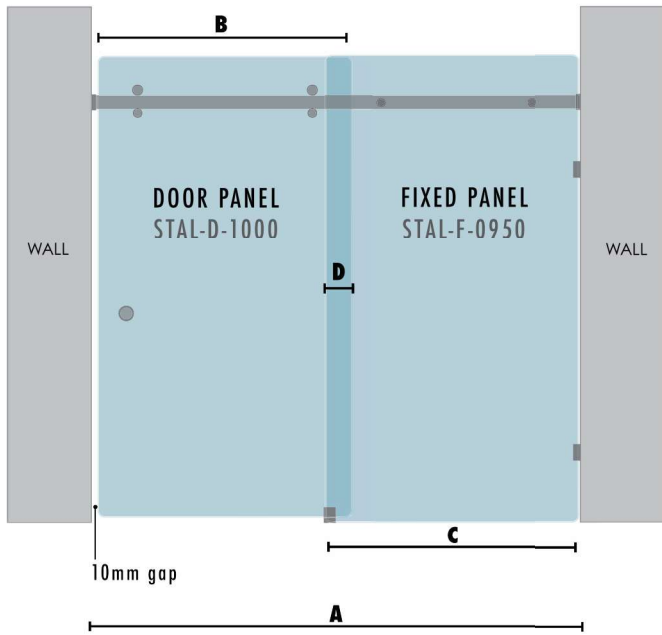

OPEN DOOR LAYOUT

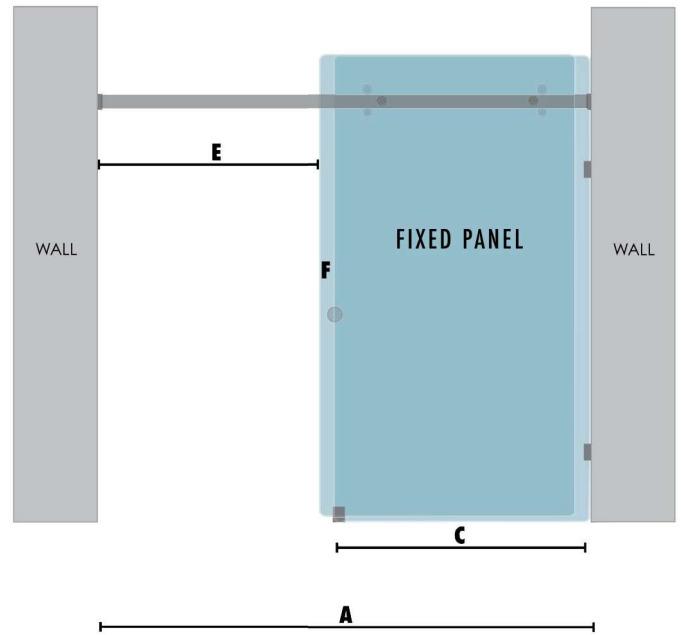

A Overall Width	B Door Width	C Fixed Panel Width	D Overlap With Closed Door	E Opening	F Panel Overlap When Door Open
1840mm	1000mm	950mm	- 123mm	625mm	62mm
1845mm	1000mm	950mm	- 118mm	630mm	62mm
1850mm	1000mm	950mm	- 113mm	635mm	62mm
1855mm	1000mm	950mm	- 108mm	640mm	62mm
1860mm	1000mm	950mm	- 103mm	645mm	62mm
1865mm	1000mm	950mm	- 98mm	650mm	62mm
1870mm	1000mm	950mm	- 93mm	655mm	62mm
1875mm	1000mm	950mm	- 88mm	660mm	62mm
1880mm	1000mm	950mm	- 83mm	665mm	62mm
1885mm	1000mm	950mm	- 78mm	670mm	62mm
1890mm	1000mm	950mm	- 73mm	675mm	62mm
1895mm	1000mm	950mm	- 68mm	680mm	62mm
1900mm	1000mm	950mm	- 63mm	685mm	62mm
1905mm	1000mm	950mm	- 58mm	690mm	62mm
1910mm	1000mm	950mm	- 53mm	695mm	62mm
1915mm	1000mm	950mm	- 48mm	700mm	62mm
1920mm	1000mm	950mm	- 43mm	705mm	62mm
1925mm	1000mm	950mm	- 38mm	710mm	62mm
1930mm	1000mm	950mm	- 33mm	715mm	62mm
1935mm	1000mm	950mm	- 28mm	720mm	62mm
1940mm	1000mm	950mm	- 23mm	725mm	62mm



**SPACINGS BASED ON ABOVE ASSUMPTIONS**

1. Fixed panel installed with Purity wall brackets which produces a 3mm silicon joint gap. If wall channel is used, specified opening sizes overlaps, etc will change.
2. Edge of glass door must remain 10mm from wall. 10mm door bulb recommended to use for buffering or if not used, 10mm safety margin gap required.
3. When door is open, minimum 15mm gap is required from wall (for safety margin buffering).